


Fig. 1

DAVE OS. #

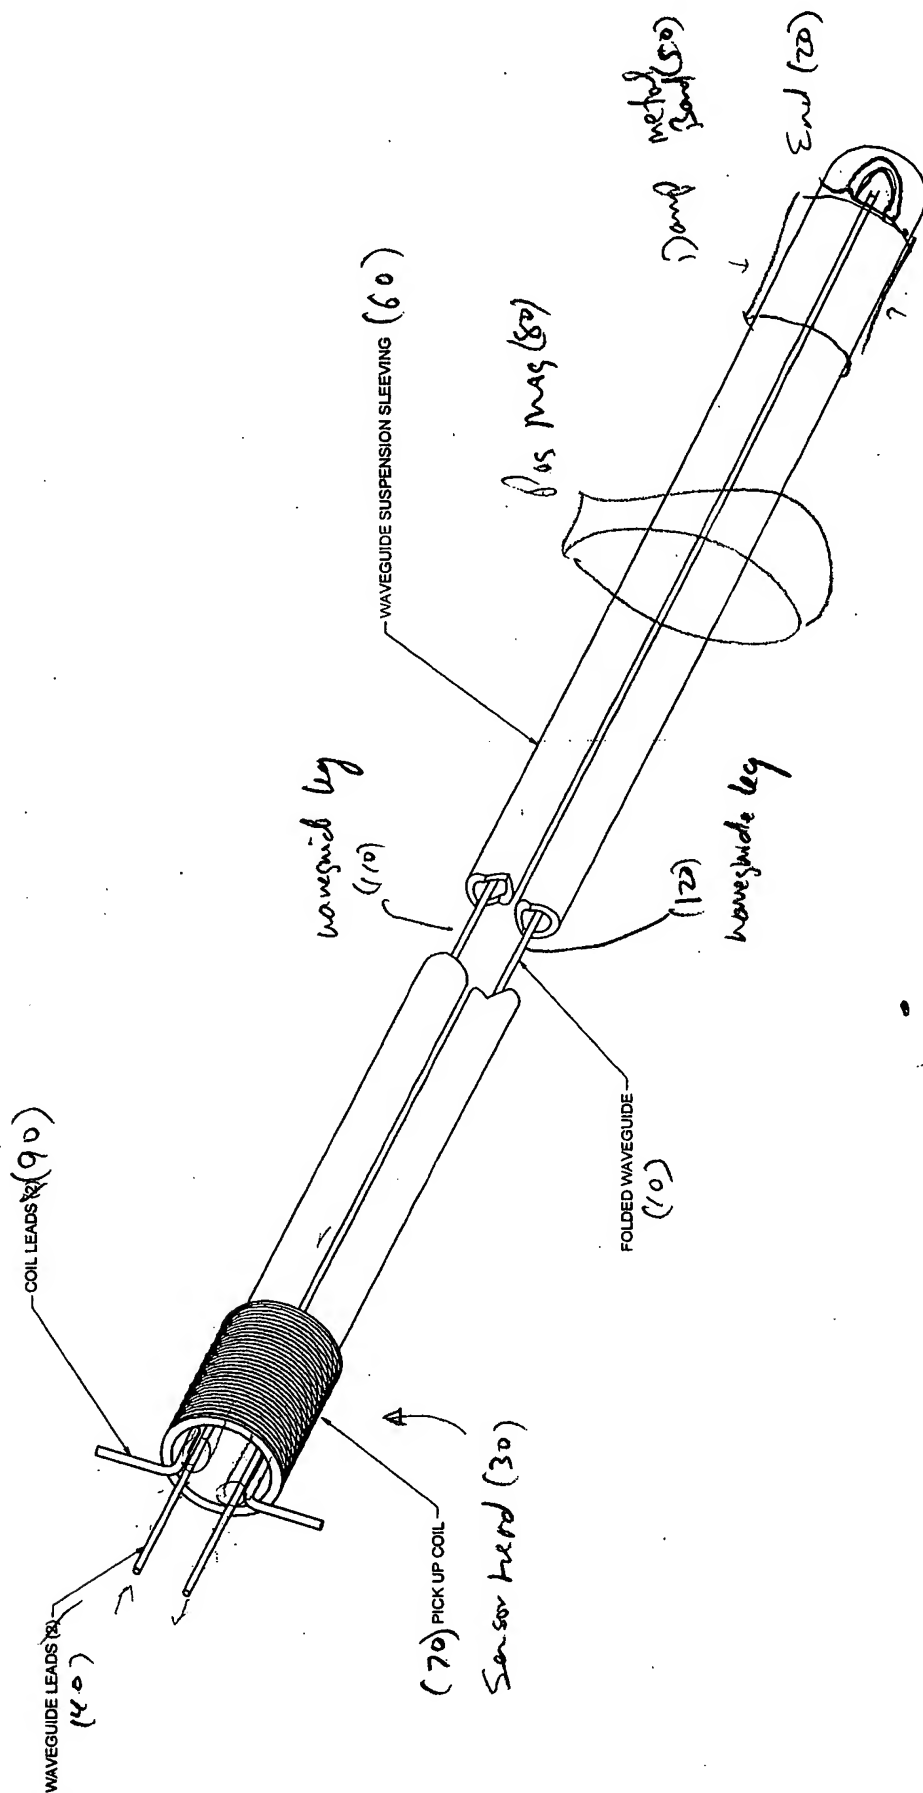

| REV | ECO # | DESCRIPTION | UNLESS OTHERWISE SPECIFIED | TITLE |
|---|-------|-------------|----------------------------|--------|
| PROPRIETARY DATA | | | | |
| THIS INFORMATION IS UNCLASSIFIED UNLESS INDICATED OTHERWISE. IT IS THE PROPERTY OF MTS SYSTEMS CORPORATION AND MAY NOT BE REPRODUCED OR DISCLOSED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF MTS SYSTEMS CORPORATION. THIS RESTRICTION INCLUDES INFORMATION THAT IS IN THE PUBLIC DOMAIN OR HAS BEEN DISCLOSED IN THE PAST OR WILL BE DISCLOSED IN THE FUTURE. | | | | |
| TOLERANCES | | 2 PLACES | 3 PLACES | ANGLES |
| | | FRACTIONS | DIMENSIONS | ± 1° |
| | | ± .01 | ± .005 | |
| THREADS ARE TO RUN FULL THROAT UNLESS OTHERWISE SPECIFIED. HOLE DRILLING AND TAP DRILLING ARE TO BE DONE TO THE FULL DEPTH OF THE HOLE UNLESS OTHERWISE SPECIFIED. | | | | |
| MACHINED SURFACE FINISH IS | | | | |
| SCALE: 1" = 1" | | | | |
| PRODUCT LINE | | | | |
| SHEET 1 OF 1 | | | | |

FIG. 2

(200)

(201)

FINISH PIN

MAGNET

(170)

TAPE

(160)

START PIN

(150)

Bobbin

(210)

Waveguide

(220)

Return pin (130)

(130)

ANCHOR

(180)

START PIN

(140)

WAVEGUIDE

(130)

Pin

(120)

(110)

(110)

(110)

(110)

